


GD-1101-19"-SNMP

If moisture is your enemy, Delair™ is your friend. We specialise in the design and development of pressurizers, ambient air, compressed air and gas conditioning equipment to protect electrical and electronic systems in telecommunications, broadcast, commercial and military applications.

By providing accurate humidity control, Delair™ units preserve your equipment, prolong its working life and reduce maintenance requirements.

WHY DELAIR™ GD-1101-19-SNMP

- Compact design
- Dry air capacity > 1.000 l/h
- Low noise / low vibration
- Low energy consumption
- Internet communication / web interface
- Mounting brackets included

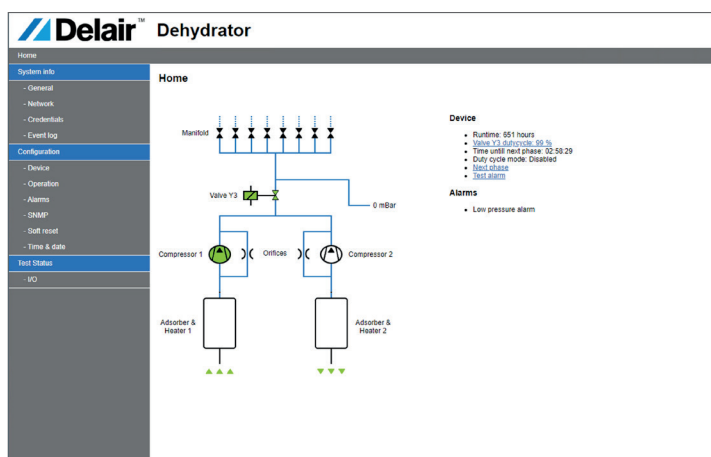

Specifications	GD-1101-19"-SNMP		
	230VAC		115VAC
Operation	Fully automatic and continuous		
Dry air capacity (l/h) at 10 mbar	> 1100		
Outlet dew point at 23°C and 83% RH	< -40 °C		
Standard working pressure (mbar) Other pressure ranges on request	20 - 30		
Power Supply (V)	230V-50Hz		115V-60Hz
Power consumption			
- Drying (W)	100		
- Regeneration (W)	500		
- Stand-by (W)	25		
Sound level dB(A)	<69		
Weight (kg)	40		
Outlets, with shut-off valve	6 Tubing 10/8 mm OD/ID , other connections on request		
Location	Indoors		
Enclosure	IP65		
Ambient temperature	-10°C - +45°C		
Relative humidity	Max. 95%		
Mounting	Width (mm)	Depth (mm)	Height (mm)
- 19" Rack	482.6	350	399
- Wall mounting	465	384	399
- Floor/Table mounting	465	350	420
Combined alarms, dry contact	Low-, high pressure, Run Time Humidity alarm (optional)		
Communication	Dry Contact SPDT TCP/IP Ethernet + SNMP		

